

High-powered slurry pumps that deliver powerful agitation, high head and high volume discharge

The GSD-series is a submersible three-phase high power, high head and high volume heavy-duty slurry pump driven by a 4-pole motor. It is equipped with a high-chromium cast iron agitator that assists smooth suction of the settled matters. The side discharge, spiral design allows smoother passage of the sucked solid matters. The motor is cooled by a water jacket that assures efficient motor cooling even when it operates with its motor exposed to air. The pump incorporates seal pressure relief ports that prevent the pumping pressure from applying to the shaft seal.





GSD-37-4



GSD-75-4

Performance Curves

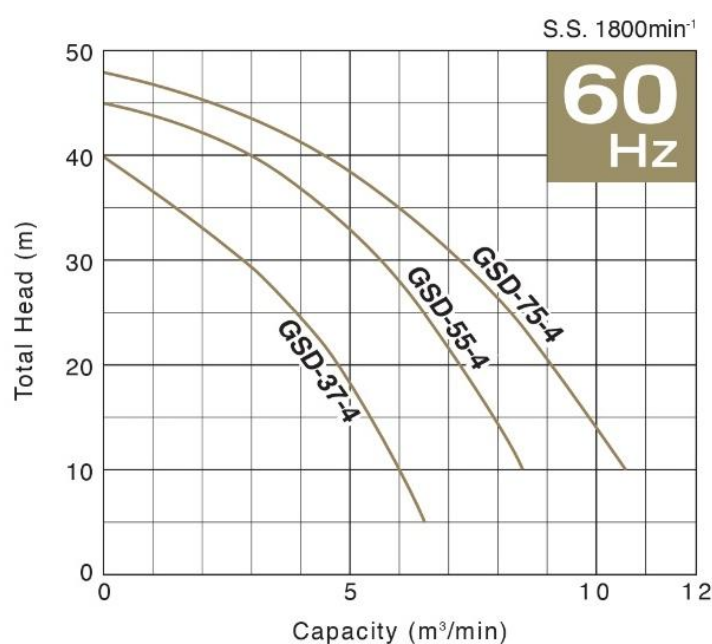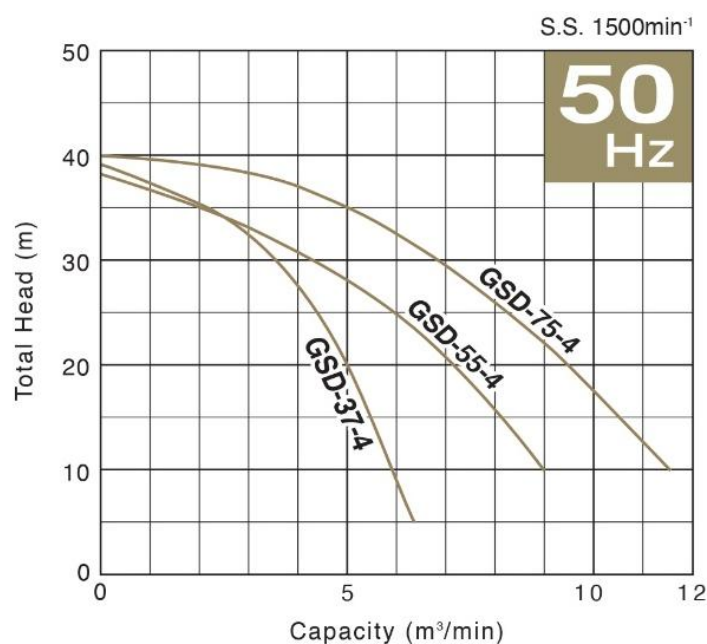

Discharge Bore mm	Model	Motor Output kW	Phase	Pole	Starting Method	Solids Passage mm	Dimensions L x W x H mm	Dry Weight kg	Cable Length m
200	GSD-37-4	37	Three	4	Star-Delta	25	915 x 660 x 1583	685	10
250	GSD-55-4	55			Star-Delta	25	1050 x 708 x 1927	1220	10
250	GSD-75-4	75			Star-Delta	25	1050 x 708 x 1927	1220	10

* Weights excluding cable



For The Earth, For All The People



PT. MASA JAYA PERKASA

M info@masajayaperkasa.com

**Jl. Hayam Wuruk No. 76,
Jakarta Barat, DKI Jakarta 11160**

(+62)21-649-6496

(+62)852-1116-7713