
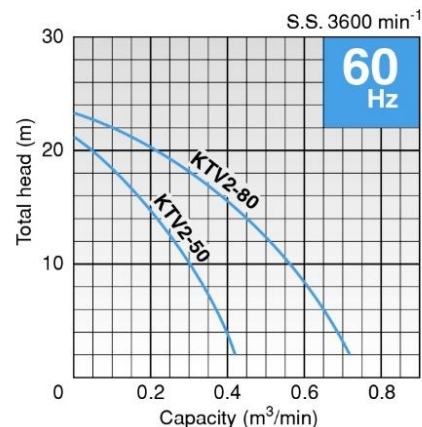


Performance Curves

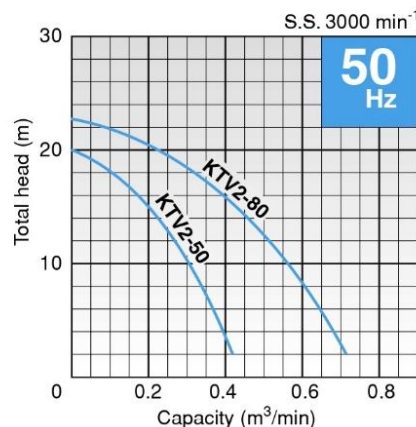

Standard Specifications 50/60Hz

Discharge Bore mm	Model	Motor Output kW	Phase	Total Head m	Capacity m³/min	Starting Method	Dry Weight kgs	Cable Length m
50	KTV2-50	2	Three-phase	12	0.25	D.O.L.	24.5	8
80	KTV2-80	3	Three-phase	12	0.50	D.O.L.	37.5	8

• Dry weight excluding cable


Major Standard Specifications

Discharge bore size mm		50	80
Item			
Pumping fluid	Type of fluid		Sludge, slurry, liquid containing mud
	Fluid temperature		0~40°C
Pump	Structure	Impeller	Semi-vortex
		Shaft seal	Double mechanical seal
		Bearing	Shielded ball bearing
	Materials	Impeller	Chromium iron casting
		Casing	Synthetic rubber (with casing retainer)
		Shaft seal (mechanical seal)	Silicon carbide
Motor	Type, Poles		Dry-type submersible induction motor, 2 poles
	Insulation		Class E
	Phase / Voltage		Three-phase/ 220V,380V,400V,415V, 440V,460V
	Motor protector (Built-in)		Circle thermal protector
	Lubricant		Turbine oil (ISO VG32)
	Materials	Frame	Aluminium alloy casting
		Shaft	Stainless steel #403
		Cable	PVC Chloroprene rubber
Discharge connection		Hose coupling	


Dimensions

Unit: mm

KTV2-50

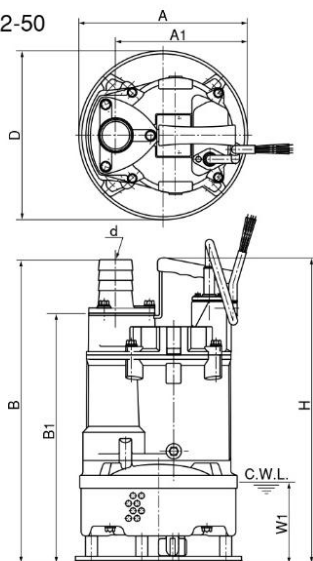

KTV2-80

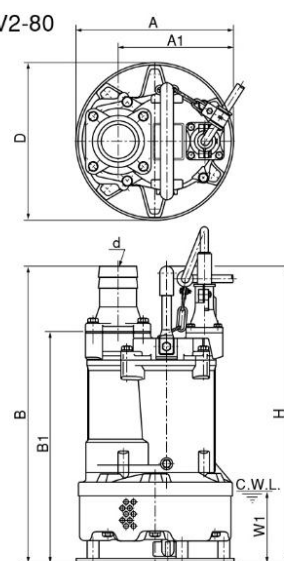

C.W.L. : Continuous Running Water Level


Model	d	A	A1	B	B1	D	H	W1
KTV2-50	50	250	192	450	368	250	454	120
KTV2-80	80	295	211	550	427	295	550	130

Standard Accessory

- Hose coupling 1pc.



Cross-Section

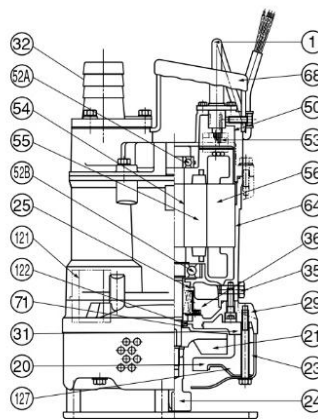

NO.	DESCRIPTIONS	NO.	DESCRIPTIONS
1	Cabletyre Cable	52A	Upper Bearing
20	Pump Casing	52B	Lower Bearing
21	Impeller	53	Motor Protector
23	Strainer Stand	54	Shaft
24	Forced Agitation	55	Rotor
25	Mechanical Seal	56	Stator
29	Oil Casing	64	Motor Frame
31	Wearing Plate	68	Handle
32	Hose Coupling	71	Shaft Sleeve
35	Oil Plug	121	Duct Sleeve
36	Lubricant	122	V-ring
50	Motor Bracket	127	Fixing Plate

• Oil Lifter is not illustrated.



For The Earth, For All The People



PT. MASA JAYA PERKASA

M info@masajayaperkasa.com

**Jl. Hayam Wuruk No. 76,
Jakarta Barat, DKI Jakarta 11160**

(+62)21-649-6496

(+62)852-1116-7713